

Mono-crystalline

STM6-PERC-XXX/72 Series

360W/365W/370W/375W/380W

12
Years

Guarantee on product material and workmanship

25
Years

Linear power output warranty



High conversion efficiency
High module efficiency to guarantee power output.



Easy Installation and Handling
For various applications



Outstanding low irradiation performance
Excellent module efficiency even in the weak light conditions, such as morning or cloudy.




Excellent loading capability
2400Pa wind loads, 5400Pa snow loads.



0 ~ +5W positive tolerance
Detailed information in Electrical Specifications



Durability against extreme environmental
High salt mist and ammonia resistance certified by TUV NORD

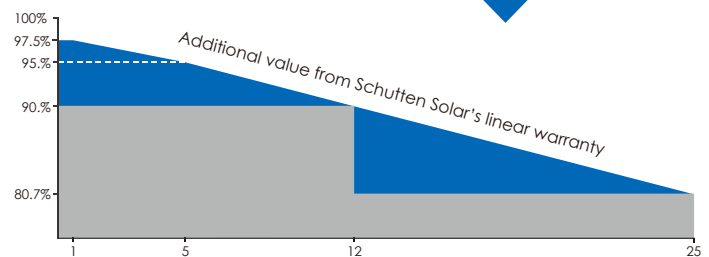

Anhui Schutten Solar Energy CO.,Ltd. known as "Schutten Solar", is one of the world's leading solar panel manufacturers. Our Slogan is "Blue Sky · Green Life". Deploying more than 2GW solar panels worldwide.



Tel : +86 25-86816810
+86 550-2309605

Email : info@schutten-solar.com
Web : www.schutten-solar.com

© Anhui Schutten Solar Energy Co.,Ltd.
STM6-XXX/72 Series_rev2018.8



Electrical Characteristics

Module Type	STM6-360/72	STM6-365/72	STM6-370/72	STM6-375/72	STM6-380/72
Maximum Power (Pmax)	360Wp	365Wp	370Wp	375Wp	380Wp
Maximum Power Voltage (Vmp)	39.35V	39.46V	39.56V	39.75V	39.82V
Maximum Power Current (Imp)	9.15A	9.25A	9.37A	9.45A	9.55A
Open-circuit Voltage (Voc)	47.52V	47.91V	48.41V	48.49V	49.18V
Short-circuit Current (Isc)	9.72A	9.83A	9.89A	9.99A	10.24A
Module Efficiency STC (%)	18.55%	18.81%	19.07%	19.33%	19.58%
Power Tolerance	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W

STC :  Irradiance 1000W/m²  Cell Temperature 25°C  AM=1.5

Mechanical Characteristics

Cell Type	Mono-crystalline 156.75×156.75mm (6 inch)
No. of cells	72 (6×12)
Dimensions	1956×992×40mm (77.00×39.05×1.57 inch)
Weight	21.0 kg (46.3 lbs.)
Front Glass	3.2mm, High Transmission, Low Iron, ARC Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	4.0mm, Length: 1200mm
Connector	MC4 Compatible
Hailstone Impact Test	80Km/h for 25mm ice ball

Thermal Characteristics

Nominal Operating Cell Temperature (NOCT)	45 ± 2 °C
Temperature Coefficients of Pmax	-0.40% / °C
Temperature Coefficients of Voc	-0.29% / °C
Temperature Coefficients of Isc	+0.048% / °C


Packaging Configuration

Container	20'GP	40'HQ	Operating Temperature	-40°C~+85°C
Pieces Per Pallet	27	27 / 5	Maximum System Voltage	1500VDC (IEC)
Pallets Per Container	10	24 / 12	Maximum System Voltage	1500VDC (BIS)
Pieces Per Container	270	708	Maximum Series Fuse Rating	15A

Maximum Ratings


Engineering Drawings

*All dimensions in mm(inch)

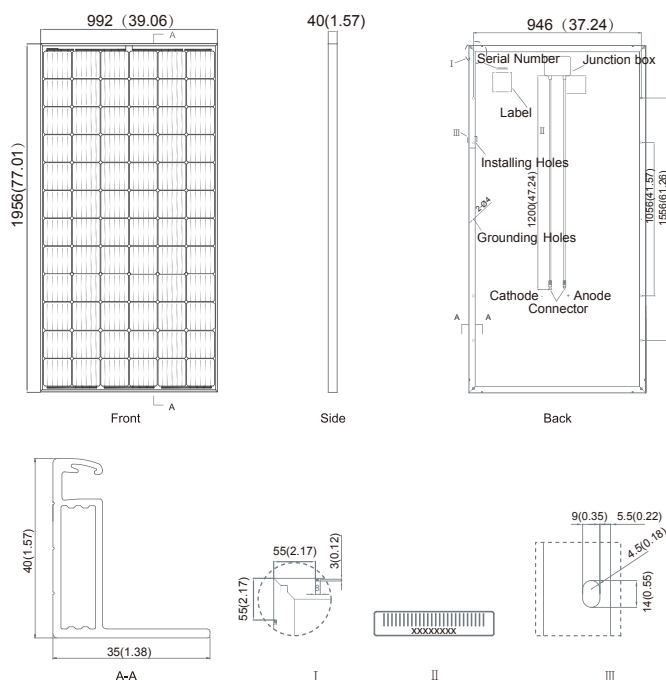

I-V Curves

Current-Voltage & Power-Voltage Curves (370W)

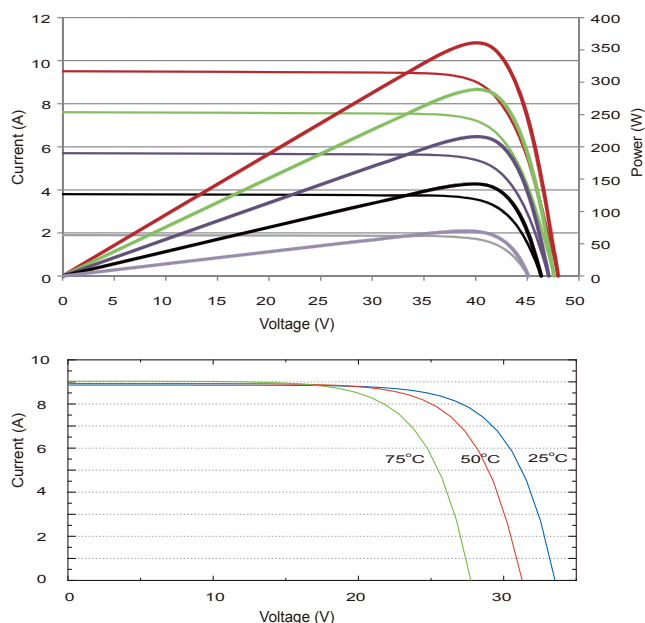

Warning :
Read the installation and user manual in its entirety before handling , installing , and operating schutten solar modules.

Schutten Partners :